




WOOD DRAWER SLIDE (Soft Close)



**Wooden Drawer
Presentation**

YouTube


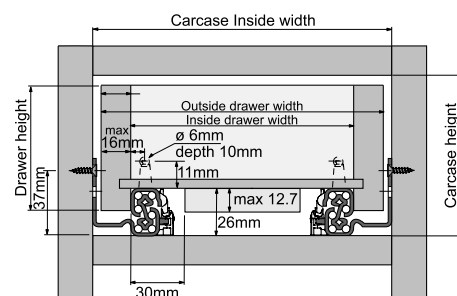


| SIZE | DESCRIPTION |
|---------|---------------------|
| 12 inch | Adjustable Fittings |
| 14 inch | Adjustable Fittings |
| 16 inch | Adjustable Fittings |
| 18 inch | Adjustable Fittings |
| 20 inch | Adjustable Fittings |

- ▶ Soft Close Drawer Slides. Anti-Rust Coating. Made With High Class Precision.
- ▶ Noiseless Soft Close Mechanism. 96 Hours+ Salt Spray Tested.
- ▶ 45000+ Cycles Tested Full Load 40 Kg.
- ▶ Five Size are available 12inch to 20inch.
- ▶ Adjustable Fitting


Wood Drawer Slide Installation Paper

First step - Side installation

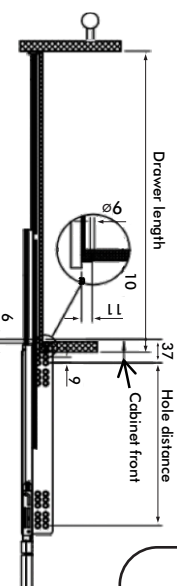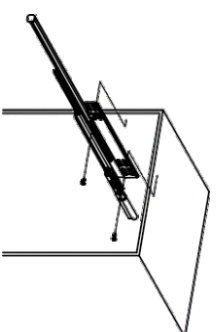


Plug in installation self operated
Simple push - in installation
Push the drawer horizontally onto the rail
That is, the installation is complete, the front connector will be pumped
The bend and the rail are connected, ensuring a draw safety fixation,

Third step - Side installation

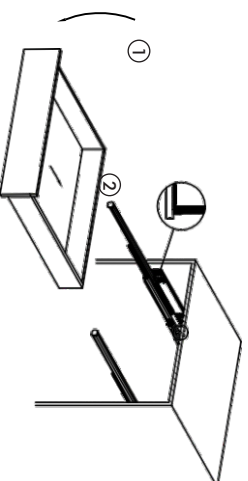


Second step - Front connector installation

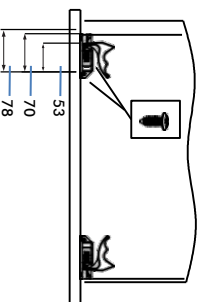


Disassembly -
The removal is simple, just put the drawer in front by hand.
The bottom of the end buckle is compressed at the same time and can be taken out of the drawer


Press the buckle with your hand and lift up immediately

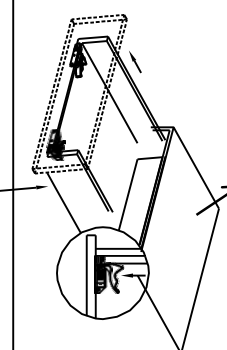

Front connector with height adjustment when the current connector has a height adjustment function, it adjusts the pumping
The gap between the bottom of the drawer and the rail, without need for the tools, passes through a white the colour wheel adjust the height of the drawer by 2 mm

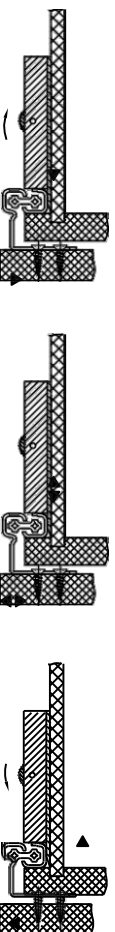

| Product Model | Drawer Length (mm) | Min. Cabinet Depth (mm) | Hole Size | 1 6 Plate Width (mm) | 1 8 Plate Width (mm) |
|---------------|--------------------|-------------------------|-----------|----------------------|----------------------|
| 12"/(300) | 300 | 313 | 160 | 20 | 22 |
| 14"/(350) | 350 | 363 | 192 | 20 | 22 |
| 16"/(400) | 400 | 413 | 224 | 20 | 22 |
| 18"/(450) | 450 | 463 | 256 | 20 | 22 |
| 20"/(500) | 500 | 513 | 256 | 20 | 22 |

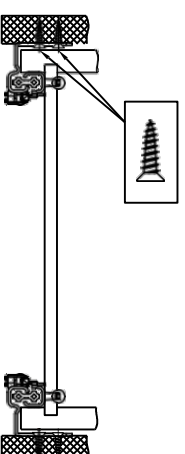

Description -

1. Load 300 Newton
2. Perfect height and side stability rails with resistance guarantee optimum taxiing .
3. The rail automatically removes dirt functions, no repair is required self operated, flat off .
4. The self operated function allows the drawer to be safely closed without weight .
5. Push in installation, Just put the drawer on the rail, push it in and the installation is complete
6. With height adjustment, The rails and can be adjusted by turning the white wheel gaps the bottom of the drawer
7. No tools are require to install and remove drawers with soft close function

Wooden Deawer Slide
Installation
You Tube

