




## GAS PUMP

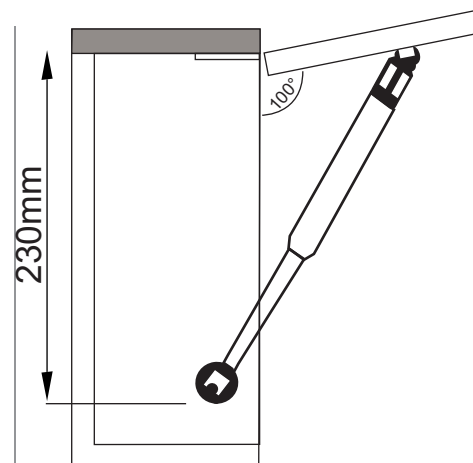

SIZE	CAPACITY	DESCRIPTION
10 Inch	05 kg.	With 3 Fitting
10 Inch	10 kg.	With 3 Fitting
10 Inch	15 kg.	With 3 Fitting
10 Inch	20 kg.	With 3 Fitting
10 Inch	25 kg.	With 3 Fitting

- Provide direct support for safely lifting, positioning, lowering and counter balancing weights.
- Offers the versatility of a wide range of forces, simple mounting, speed-controlled damping, and cushioned end motion, combined with a flat force curve.
- Can be used in vehicle compartments, supporting adjustable chairs and tables, on all manner of easy-open hatches & panels, and even in small electronic devices.
- Provides controlled way of storing and releasing energy as smooth, cushioned movement, transferred via a sliding piston and rod.
- Easy to install and operate. fixing pressure up to 25 kg load capacity. Size: 10 inch

ITEM CODE - GP-PRESSURE







GAS SPRING:



LOADING : 50N/100N/150N/200N/250N  
(others on request)

Simple installation of GAS SPRING - suitable  
for wood door and aluminium-frame



## WARNING !

A: Please don't use lubrication oil or similar  
It could affect the function of gas spring  
Please screw on the fixing-plates  
well aligned on to the slide-panel/door.

B: In normal pressure, gas spring should be used  
within the following temperature:  
Maximum temperature can not exceed 55°C